




## CAR-MON SERIES CTA CLAMPING TYPE STAINLESS STEEL ADAPTER



CTA-6

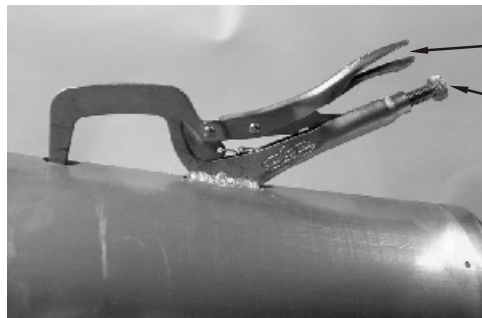

RELEASE HANDLE  
ADJUSTMENT KNOB

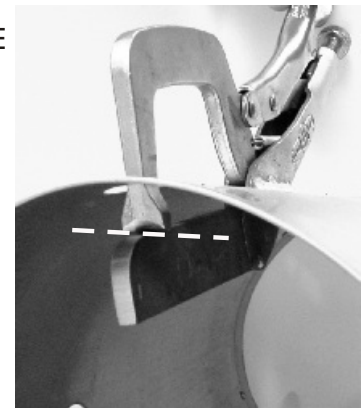

CLAMP SHOWN IN CLOSED POSITION. DOTTED LINE INDICATES WHERE TOP EDGE OF TAILPIPE SHOULD BE

TO SECURE ADAPTER TO TAIL PIPE, GRASP RELEASE HANDLE AND BOTTOM HANDLE, AND SQUEEZE TOGETHER. MECHANISM SHOULD CLICK AND LOCK INTO POSITION. IF IT DOES NOT, ADJUST OPENING OR CLOSING SPACE BY USE OF THE ADJUSTMENT KNOB.

NOTE: IF THERE IS A DAMPER INSTALLED BEHIND THE ADAPTER, MAKE SURE IT IS IN THE OPEN POSITION.

Once clamp adapter is in place, make sure the system fan is running. Once this is confirmed, vehicle may be started for servicing.

After servicing vehicle, turn vehicle off and leave tube connected and fan running for a few minutes to clear any exhaust in system and allow for exhaust adapter to cool. DO NOT REMOVE ADAPTER FROM EXHAUST PIPE WHILE HOT. When cool, remove adapter.